



The Australian Pipe Company

# Concrete Pipes

QUEENSLAND  
Flush & Rubber Ring Joint




RCPA, the Australian Pipe Company, is the leading manufacturer of vertically cast concrete pipes in Australia.

The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision manufacturing technology
- Low impact, sustainable process



# RUBBER RING JOINTED PIPES

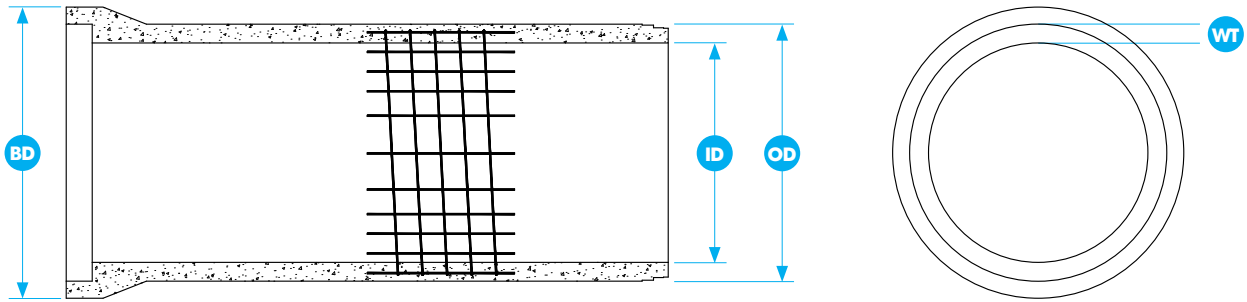


ID Inner Diameter    
 OD Outer Diameter    
 BD Bell Diameter    
 WT Wall Thickness

Nom. ID (mm)	Pipe ID (mm)	Bell OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	295	455	376	376	376	260	260	260
375	370	546	459	459	459	340	340	340
450	445	643	544	544	544	430	430	448
525	520	734	627	627	652	550	550	710
600	595	824	708	708	728	710	710	820
675	670	913	793	860	860	860	1310	1310
750	745	1004	868	908	908	1030	1240	1240
825	818	1093	961	1012	1012	1200	1650	1650
900	893	1184	1048	1077	1077	1450	1710	1710
1050	1043	1345	1199	1237	1237	1680	2030	2030
1200	1193	1532	1365	1406	1406	2180	2610	2610
1350	1343	1690	1520	1567	1567	2640	3250	3250
1500	1493	1910	1680	1730	1730	3200	3840	3840
1650	1643	2055	1830	1930	1930	3580	4685	4685
1800	1793	2226	1990	2106	2106	4059	5780	5780
2100	2093	2556	2300	2400	2400	5000	6570	6570

\* Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/ NZS 4058:2007 for normal environment exposure conditions
- Marine environment pipes available upon request

# FLUSH JOINTED PIPES

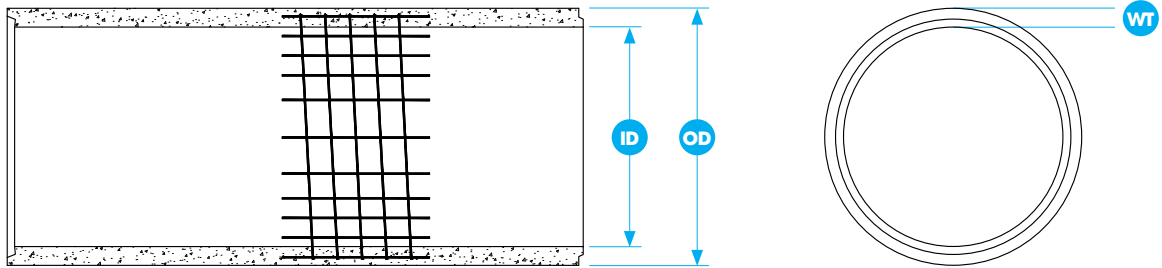

**ID** Inner Diameter


**OD** Outer Diameter

**WT** Wall Thickness

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)			Weight (kg)		
		Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	295	366	366	366	210	210	210
375	370	458	458	458	408	408	408
450	445	544	544	566	481	481	530
525	520	627	652	652	463	590	590
600	595	706	706	727	553	553	671
675	670	798	798	-	735	735	-
750	745	870	908	908	798	1089	1089
825	818	962	962	-	998	1007	-
900	893	1040	1078	1078	1107	1470	1470
1050	1043	1195	1238	1238	1370	1787	1814
1200	1193	1363	1398	1398	1724	2177	2177
1350	1343	1524	1570	1570	1996	2631	2631
1500	1493	1686	1732	1732	2377	3084	3084
1650	1643	1848	1930	1930	2903	4300	4300
1800	1793	2001	2080	2080	3211	4900	4900
2100	2093	2330	2330	2330	4345	5760	5760

\* Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber external bands supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/ NZS 4058:2007 for normal environment exposure conditions
- Marine environment pipes available upon request

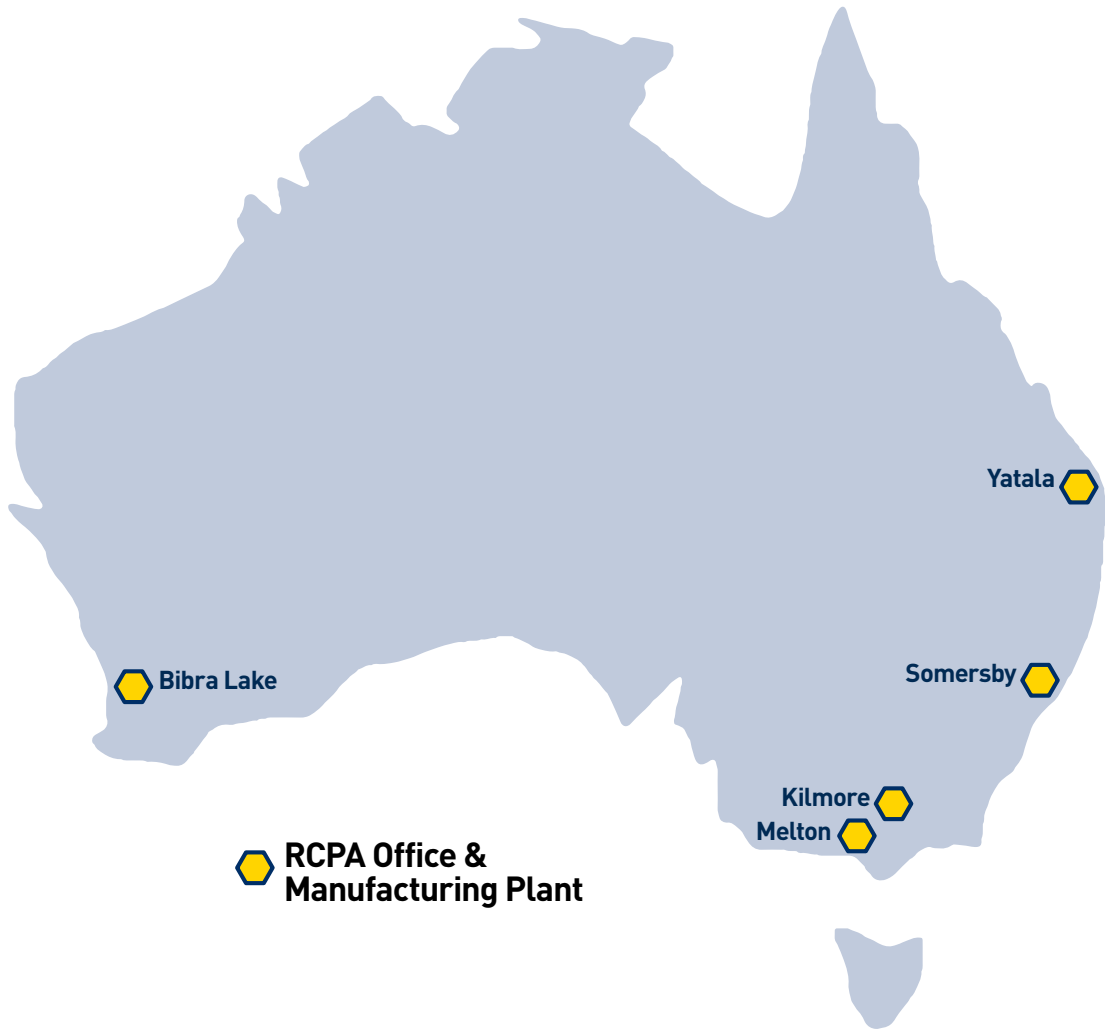

**Contact**

Phone: 1800 88 RCPA (7272)

Website: [www.rcpa.com.au](http://www.rcpa.com.au)