



The Australian Pipe Company

# Concrete Pipes

VICTORIA & SOUTH AUSTRALIA  
Flush & Rubber Ring Joint




RCPA, the Australian Pipe Company, is the leading manufacturer of vertically cast concrete pipes in Australia.

The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision manufacturing technology
- Low impact, sustainable process



# RUBBER RING JOINTED PIPES

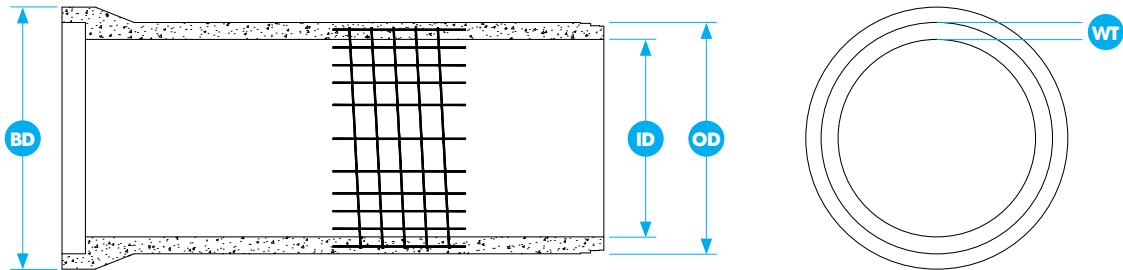


ID Inner Diameter    
 OD Outer Diameter    
 BD Bell Diameter    
 WT Wall Thickness

Nom. ID (mm)	Pipe ID (mm)	Bell OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
225	220	370	295	295	295	180	180	180
300	295	455	370	370	370	240	240	240
375	370	546	453	453	453	315	315	315
450	445	643	538	538	538	450	450	450
525	520	734	623	623	645	530	530	650
600	595	825	698	698	720	650	650	720
675	670	913	785	785	855	860	860	1150
750	745	1005	870	870	910	1070	1070	1270
825	818	1094	961	961	1005	1210	1210	1500
900	893	1185	1046	1046	1076	1360	1360	1650
1050	1043	1344	1188	1188	1238	1680	1680	2095
1200	1193	1533	1356	1396	1396	2100	2445	2445
1350	1343	1690	1520	1580	1580	2610	3200	3200
1500	1493	1910	1680	1730	1730	3185	4100	4100
1650	1643	2056	1830	1910	1910	3720	TBA	TBA
1800	1793	2226	1990	2070	2070	4360	5700	5700
1950	1943	2390	2390	2390	2390	6200	6200	6200
2100	2093	2556	2300	2360	2360	5400	7000	7000
2400	2393	2920	2730	2730	2730	8400	8400	8400
2700	2693	3250	3050	3050	3050	9700	9700	9700
3000	2993	3400	3400	3400	3400	12200	12200	12200
3300	3293	3750	3750	3750	3750	15800	15800	15800
3600	3593	4120	4120	4120	4120	20000	20000	20000

\* Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Class 6, 8 and 10 available upon request
- Pipes listed above conform with AS/ NZS 4058:2007 for normal environment exposure conditions
- Marine environment pipes available upon request

# FLUSH JOINTED PIPES

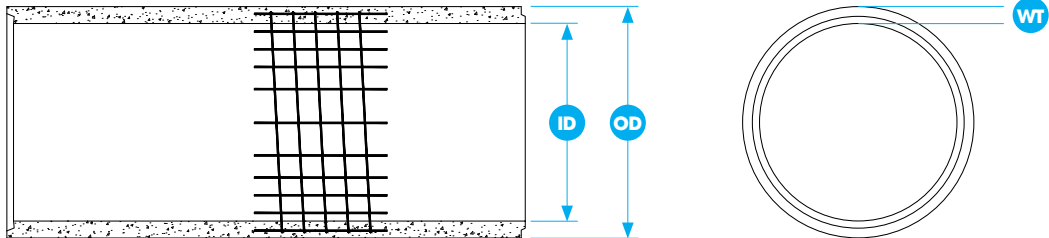

**ID** Inner Diameter

**OD** Outer Diameter

**WT** Wall Thickness

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)			Weight (kg)		
		Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	295	366	366	366	210	210	210
375	370	451	451	451	290	290	290
450	445	544	544	544	400	400	400
525	520	619	619	653	480	480	640
600	595	708	708	728	570	570	750
675	670	791	791	-	740	740	-
750	745	870	870	908	920	920	1200
825	818	961	961	-	1210	1210	-
900	893	1046	1046	1078	1270	1270	1500
1050	1043	1194	1194	1238	1510	1510	1900
1200	1193	1360	1406	1406	1900	2400	2400
1350	1343	1540	1570	1570	2250	2700	2700
1500	1493	1680	1730	1730	2800	4100	4100
1650	1643	1830	1830	1923	3200	3200	5100
1800	1793	1990	1990	2073	3700	3700	5700
1950	1943	2260	2260	2260	6100	6100	6100
2100	2093	2300	2300	2373	5180	5180	6500
2400	2393	2730	2730	2730	8000	8000	8000
2700	2693	2950	2950	2950	9300	9300	9300
3000	2993	TBA	TBA	TBA	TBA	TBA	TBA
3300	3293	TBA	TBA	TBA	TBA	TBA	TBA
3600	3593	TBA	TBA	TBA	TBA	TBA	TBA

\* Dimensions and weights subject to change

- Effective length:
  - DN300-2100 = 2340mm
  - DN2400-2700 = 2425mm
  - DN3000-3600 = TBA
- Sand bands available on request
- Class 6, 8 & 10 available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine environment pipes available upon request



**Contact**

Phone: 1800 88 RCPA (7272)

Website: [www.rcpa.com.au](http://www.rcpa.com.au)