

FRCPIPE+



RCPA offers **FRCPIPE+**, an innovative reinforced concrete pipe designed to meet a 100 year service life.


FRCPIPE+ concrete pipes are manufactured using a high strength, light weight fibre-reinforced concrete composite. This high performance stormwater drainage pipe is ideal for road drainage as well as commercial developments.

The **Dual Rubber Ring Joint** with Collar is a robust, precision machined joint utilising a separate collar. This provides excellent resistance to in-ground settlement during installation. This, combined with the **FRCPIPE+** core DNA, delivers a reinforced concrete pipe that is quick to install and proven to last.

Fast. Smart. Proven. Strong.

FRCPIPE+

Dual Rubber Ring Joint with Collar

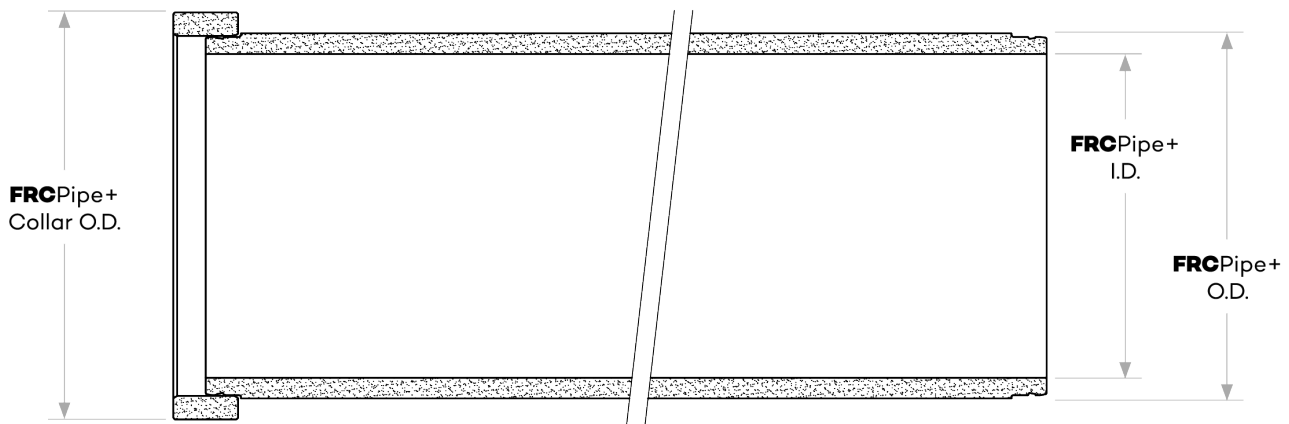

| Nom. ID (mm) | Pipe ID (mm) | Collar OD (mm) | Pipe OD (mm) | | | Weight (kg) | | |
|--------------|--------------|----------------|--------------|---------|---------|-------------|---------|---------|
| | | | Class 2 | Class 3 | Class 4 | Class 2 | Class 3 | Class 4 |
| 225 | 233 | 305 | n/a | n/a | 274 | n/a | n/a | 114 |
| 300 | 302 | 392 | n/a | 349 | 354 | n/a | 168 | 186 |
| 375 | 378 | 476 | 427 | 432 | 439 | 226 | 239 | 271 |
| 450 | 455 | 580 | 512 | 520 | 530 | 305 | 348 | 402 |
| 525 | 532 | 670 | 594 | 607 | 619 | 384 | 465 | 542 |
| 600 | 608 | 755 | 679 | 694 | 707 | 500 | 607 | 702 |
| 675 | 673 | 835 | 751 | 768 | 785 | 637 | 777 | 909 |
| 750 | 719 | 885 | 802 | 820 | 837 | 714 | 866 | 1012 |

*Dimensions and weights subject to change

- Easy pipe assembly – low insertion forces mean less effort to join pipes
- Dual v-ring collared joint
- High strength joint
- Compliant with NSW RMS - R11 Stormwater Drainage
- **FRCPipe** complies with AS4139-2003
- **FRCPipe** is marine grade as standard
- Nominal length is 4m