

RCPA offers FRCPIPE+, an innovative reinforced concrete pipe designed to meet a 100 year service life.


FRCPIPE+ concrete pipes are manufactured using a high strength, light weight reinforced concrete composite. This high performance stormwater drainage pipe is ideal for road drainage as well as commercial developments.

The **Dual Rubber Ring Joint with Collar** is a robust, precision machined joint utilising a separate collar. This provides excellent resistance to in-ground settlement during installation. This, combined with the **FRC**PIPE+ core DNA, delivers a reinforced concrete pipe that is quick to install and proven to last.





Dual Rubber Ring Joint with Collar

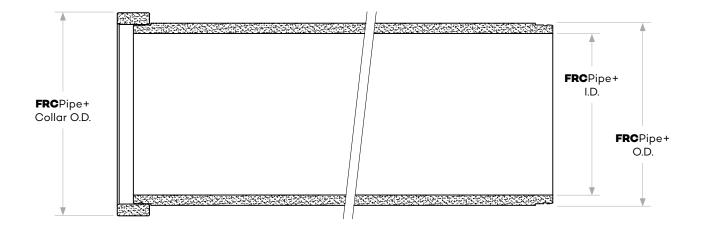

Nom. ID (mm)	Pipe ID (mm)	Collar OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
225	233	305	273	n/a	274	113	n/a	118
300	302	392	346	347	352	163	166	185
375	378	476	427	430	437	225	238	270
450	455	580	512	517	527	318	345	399
525	532	670	593	604	616	395	463	539
600	608	755	677	690	703	506	599	693
675	673	837	751	768	785	637	772	909
750	719	885	802	820	837	714	866	1012

^{*}Dimensions and weights subject to change

- Easy pipe assembly low insertion forces mean less effort to join pipes
- Dual v-ring collared joint
- High strength joint

- FRCPipe+ comply with AS4139-2003
- FRCPipe+ is marine grade as standard
- Nominal length is 4m

