



## **RCPA**, the Australian Pipe Company, is the leading manufacturer of Vertically Cast Concrete Pipes in Australia.

The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;


- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process



THE AUSTRALIAN PIPE COMPANY

# SRC PIPE

## Rubber Ring Joint

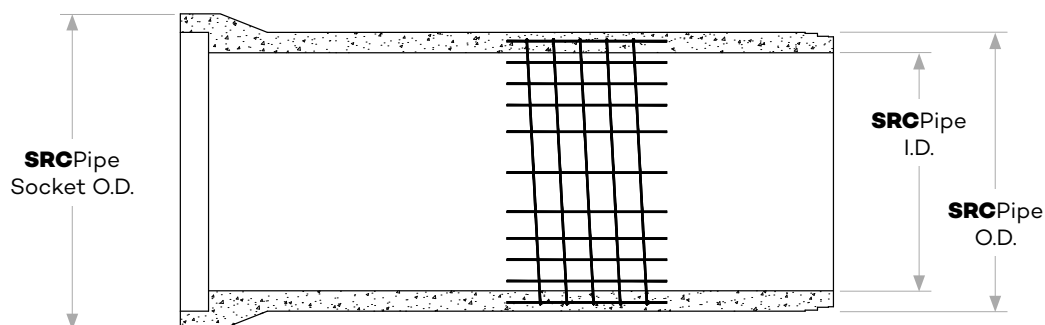


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
225	220	370	295	295	295	180	180	180
300	295	455	378	378	378	240	240	240
375	370	546	455	455	455	315	315	315
450	445	643	541	541	541	450	450	450
525	520	734	622	622	645	530	530	650
600	595	825	704	704	720	650	650	720
675	670	913	785	785	855	860	860	1150
750	745	1005	877	877	910	1070	1070	1270
825	820	1094	961	961	1005	1210	1210	1500
900	895	1185	1046	1046	1079	1460	1460	1660
1050	1045	1344	1188	1188	1238	1680	1680	2095
1200	1195	1532	1356	1356	1396	2100	2100	2445
1350	1345	1690	1520	1520	1580	2610	2610	3200
1500	1495	1910	1680	1730	1730	3185	4100	4100
1650	1645	2056	1830	1910	1910	3720	??	??
1800	1795	2226	1990	2070	2070	4360	5700	5700
1950	1945	2390	2390	2390	2390	6200	6200	6200
2100	2095	2556	2300	2360	2360	5400	7000	7000
2400	2395	2920	2730	2730	2730	8400	8400	8400
2700	2695	3250	3050	3050	3050	9700	9700	9700
3000	2995	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3300	3295	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3600	3595	TBA	TBA	TBA	TBA	TBA	TBA	TBA

\*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request

# SRC PIPE

## Flush Joint

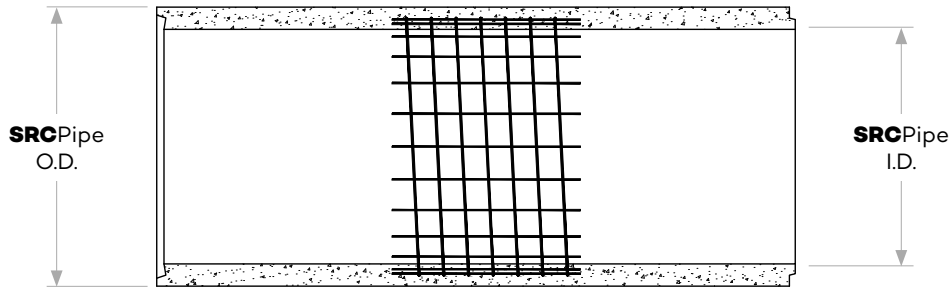

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)			Weight (kg)		
		Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	295	366	366	366	210	210	210
375	370	451	451	451	290	290	290
450	445	544	544	544	400	400	400
525	520	619	619	619	480	480	480
600	595	708	708	708	570	570	570
675	670	791	791	-	740	740	-
750	745	870	870	908	920	920	1200
825	820	961	961	-	1210	1210	-
900	895	1046	1046	1078	1270	1270	1500
1050	1045	1194	1194	1238	1510	1510	1900
1200	1195	1360	1360	1406	1900	1900	2400
1350	1345	1540	1540	1570	2250	2250	2700
1500	1495	1680	1730	1730	2800	4100	4100
1650	1645	1830	1923	1923	3200	5100	5100
1800	1795	1990	2073	2073	3700	5700	5700
1950	1945	2260	2260	2260	6100	6100	6100
2100	2095	2300	2373	2373	5180	6500	6500
2400	2395	2730	2730	2730	8000	8000	8000
2700	2695	2950	2950	2950	9300	9300	9300
3000	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3300	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3600	TBA	TBA	TBA	TBA	TBA	TBA	TBA

\*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request



**1800 88 RCPA (7272)**  
[rcpa.com.au](http://rcpa.com.au)



THE AUSTRALIAN PIPE COMPANY